


盘头十字自攻螺丝参数

参考标准:PA 材质:304HC 单位:元/千件
材质:铁, 备注: 加硬或电镀按客需求



d:代表螺纹直径 L:代表总长度(含头部)
k:代表头部厚度 dk:代表头部直径

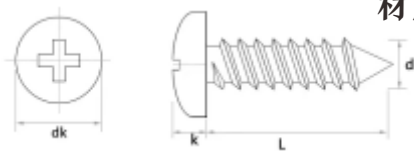


价格规格 长度	M1.0 报价	包装 数量/千	单重 kg/千	M1.2 报价	包装 数量/千	单重 kg/千	M1.4 报价	包装 数量/千	单重 kg/千	M1.7 报价	包装 数量/千	单重 kg/千	M2.0 报价	包装 数量/千	单重 kg/千	M2.2 报价	包装 数量/千	单重 kg/千
3		10	0.02		10	0.02		10	0.036									
4		10	0.02		10	0.03		10	0.052		10	0.101		10	0.118			
5		10	0.02		10	0.04		10	0.06		10	0.106		10	0.134		10	0.167
6		10	0.03		10	0.04		10	0.07		10	0.114		10	0.151		10	0.183
8		10	0.04		10	0.06		10	0.085		10	0.144		10	0.192		10	0.216
10					10			10	0.111		10	0.162		10	0.202		10	0.271
12											10	0.188		10	0.25		10	0.302
14											10	0.214		10	0.26		10	0.36
16											10	0.266		10	0.31		10	0.39
18														10	0.34		10	0.42
20														10	0.38		10	0.45
头部大小	1.6-1.8			1.8-2.0			2.3-2.5			3.0-3.2			3.4-3.6			3.6-3.8		
头厚角度	0.5-0.6			0.6-0.8			0.6-0.8			1-1.2			1.1-1.3			1.4-1.6		
价格规格 长度	M2.3 报价	包装 数量/千	单重 kg/千	M2.6 报价	包装 数量/千	单重 kg/千	M3 报价	包装 数量/千	单重 kg/千	M3.5 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千			
5		10	0.17															
6		10	0.18		12	0.25		10	0.38									
8		10	0.22		10	0.32		10	0.44		5	0.6		3	0.75			
10		0	0.27		10	0.36		10	0.52		5	0.68		2.5	0.94			
12		10	0.3		10	0.4		10	0.57		5	0.78		2.2	1			
14		10	0.36		10	0.48		3.6	0.63		2.5	0.89		1.8	1.16			
16		10	0.39		10	0.52		3	0.7		2.5	1.07		1.7	1.32			
18		10	0.42		5	0.58		5	0.77		2.5	1.24		1.5	1.49			
20		10	0.45		5	0.66		6	0.84		2.5	1.26		1.2	1.52			
22		10	0.48		5	0.75		5	0.9		2.5	1.45						
25		10	0.52		5	0.84		5	1.01		1.1	1.52						
30					5	1.01												
头部大小	3.6-3.8			4.8-4.5			5.2-5.5			5.7-6.0			6.5-6.7					
头厚角度	1.4-1.6			1.5-1.7			1.7-1.9			2.0-2.2			2.2-2.4					

沉头十字自攻螺丝参数 YIHUASHENG®

参考标准:KA 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求

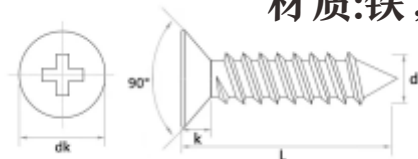

d:代表螺纹直径 L:代表总长度(含头部)
k:代表头部厚度 dk:代表头部直径




价格 规格 长度	M1.0			M1.2			M1.4			M1.7			M2.0			M2.2		
	报价	包装数量/千	单重kg/千	报价	包装数量/千	单重kg/千	报价	包装数量/千	单重kg/千	报价	包装数量/千	单重kg/千	报价	包装数量/千	单重kg/千	报价	包装数量/千	单重kg/千
3		10	0.01		10	0.02		10	0.03									
4		10	0.02		10	0.03		10	0.04		10	0.06						
5		10	0.02		10	0.03		10	0.05		10	0.07		10	0.09		10	0.11
6		10	0.03		10	0.04		10	0.05		10	0.08		10	0.11		10	0.13
10		10	0.04		10	0.05		10	0.07		10	0.11		10	0.14		10	0.16
12					10			10	0.09		10	0.13		10	0.17		10	0.22
14											10	0.15		10	0.2		10	0.26
16											10	0.18		10	0.24		10	0.3
18											10	0.21		10	0.27		10	0.34
20														10	0.31		10	0.38
														10	0.35		10	0.42
头部大小	1.6-1.8			1.8-2.0			2.3-2.5			3.0-3.2			3.4-3.6			3.6-3.9		
头厚角度	90° +/-2			90° +/-2			90° +/-2			90° +/-2			90° +/-2			90° +/-2		
价格 规格 长度	M2.3			M2.6			M3			M3.5			M4					
	报价	包装数量/千	单重kg/千	报价	包装数量/千	单重kg/千	报价	包装数量/千	单重kg/千	报价	包装数量/千	单重kg/千	报价	包装数量/千	单重kg/千			
5		10	0.11															
6		10	0.13		10	0.2		10	0.23									
8		10	0.16		10	0.22		10	0.33		5	0.53		4.2	0.64			
10		10	0.22		10	0.27		10	0.36		5	0.57		3.2	0.75			
12		10	0.26		10	0.32		10	0.44		5	0.68		2.5	0.84			
14		10	0.3		10	0.37		10	0.52		5	0.78		2.2	0.94			
16		10	0.34		10	0.42		10	0.61		5	0.88		2	1.07			
18		10	0.38		10	0.48		5	0.69		4	0.99		2	11.8			
20		10	0.42		10	0.54		5	0.77		4	1.1		1.5	1.35			
25					10									1.1	1.68			
30					10									1	20.7			
35					10									0.7	2.26			
40																		
头部大小	3.6-3.9			4.3-4.5			5.2-5.5			5.7-6.0			7.0-7.3					
头厚角度	90° +/-2			90° +/-2			90° +/-2			90° +/-2			90° +/-2					

盘头十字平尾自攻螺丝参数

参考标准:PB 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求

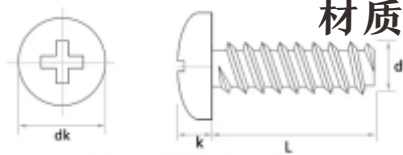


d:代表螺纹直径 L:代表总长度(含头部)
k:代表头部厚度 dk:代表头部直径



价格 规格 长度	M1.0 报价	包装 数量/千	单重 kg/千	M1.2 报价	包装 数量/千	单重 kg/千	M1.4 报价	包装 数量/千	单重 kg/千	M1.7 报价	包装 数量/千	单重 kg/千	M2.0 报价	包装 数量/千	单重 kg/千	M2.2 报价	包装 数量/千	单重 kg/千
3		10	0.04		10	0.05		10	0.05		10	0.06						
4		10	0.05		10	0.05		10	0.05		10	0.07		10	0.13			
5		10	0.05		10	0.06		10	0.06		10	0.08		10	0.14			
6		10	0.06		10	0.07		10	0.07		10	0.13		10	0.16			
8								10	0.09		10	0.14		10	0.19			
10														10	0.23			
12														10	0.26			
14														10	0.29			
16														10	0.33			
头部大小	1.6-1.8			1.8-2.0			2.3-2.5			3.0-3.2			3.4-3.6					
头厚角度	0.5-0.6			0.6-0.8			0.6-0.8			1-1.2			1.1-1.3					
价格 规格 长度	M2.3 报价	包装 数量/千	单重 kg/千	M2.6 报价	包装 数量/千	单重 kg/千	M3 报价	包装 数量/千	单重 kg/千	M3.5 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千			
3		10						10										
4		10	0.16		10	0.23		10	0.34									
5		10	0.18		10	0.25		10	0.36									
6		10	0.2		10	0.28		10	0.38									
8		10	0.26		10	0.32		10	0.47									
10		10	0.3		10	0.36		10	0.54									
12		10	0.32		10	0.44		10	0.61									
14		10	0.35		10	0.48		10	0.68									
16		10	0.37		10	0.53		10	0.78									
18					10	0.57		5	0.88									
20					10	0.62		5	0.98									
头部大小	3.6-3.9			4.3-4.5			5.2-5.5			5.7-6.0			6.5-6.7					
头厚角度	1.3-1.6			1.5-1.7			1.7-1.9			2.0-2.2			2.2-2.4					

沉头十字平尾自攻螺丝参数

参考标准:KB 材质:304HC 单位:元/千件
材质:铁, 备注:加硬或电镀按客需求

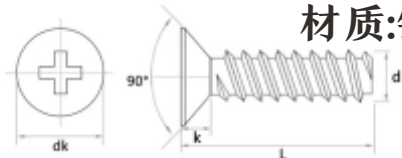

d:代表螺纹直径 L:代表总长度(含头部)
k:代表头部厚度 dk:代表头部直径



价格 规格 长度	M1.0 报价	包装 数量/千	单重 kg/千	M1.2 报价	包装 数量/千	单重 kg/千	M1.4 报价	包装 数量/千	单重 kg/千	M1.7 报价	包装 数量/千	单重 kg/千	M2.0 报价	包装 数量/千	单重 kg/千	M2.2 报价	包装 数量/千	单重 kg/千
3		10	0.02		10	0.03		10	0.04		10	0.05		10	0.11			
4		10	0.02		10	0.03		10	0.04		10	0.07		10	0.12			
5		10	0.03		10	0.03		10	0.05		10	0.08		10	0.14			
6		10	0.03		10	0.04		10	0.06		10	0.09		10	0.15			
8					10	0.04		10	0.07		10	0.12		10	0.18			
10											10	0.15		10	0.21			
12														10	0.24			
头部大小	1.6-1.8			1.8-2.0			2.3-2.5			3.0-3.2			3.4-3.6					
头厚角度	90° +/-2			90° +/-2			90° +/-2			90° +/-2			90° +/-2					
价格 规格 长度	M2.3 报价	包装 数量/千	单重 kg/千	M2.6 报价	包装 数量/千	单重 kg/千	M3 报价	包装 数量/千	单重 kg/千	M3.5 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千			
4		10	0.12															
5		10	0.14		10	0.17		10	0.26									
6		10	0.15		10	0.19		10	0.29									
8		10	0.19		10	0.24		10	0.36									
10		10	0.23		10	0.29		10	0.42									
12		10	0.26		10	0.38		10	0.48									
14								10	0.54									
16								10	0.58									
18								10	0.62									
20								10	0.66									
22																		
25																		
30																		
头部大小	3.6-3.9			4.3-4.5			5.2-5.5			5.7-6.0			7.0-7.3					
头厚角度	90° +/-2			90° +/-2			90° +/-2			90° +/-2			90° +/-2					

带介十字自攻螺丝参数



参考标准:PWA 材质:304HC 单位:元/千件


材质:铁, 备注: 加硬或电镀按客需求

规格 长度	M1.7 报价	包装 数量/千	单重 kg/千	M2 报价	包装 数量/千	单重 kg/千	M2.3 报价	包装 数量/千	单重 kg/千	M2.6 报价	包装 数量/千	单重 kg/千	M3 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千
4		10	0.17		10	0.2												
5		10	0.17		10	0.22		10	0.29		10	0.39						
6		10	0.17		10	0.23		10	0.31		10	0.41		10	0.54			
8		10	0.2		10	0.26		10	0.35		10	0.46		10	0.6		15	0.88
10		10	0.25		10	0.3		10	0.39		10	0.51		10	0.66		5	1
12					10	0.33		10	0.43		10	0.56		10	0.73		5	1.13
14														10	0.79		5	1.27
16														10	0.86		5	1.39
20														5	0.98		5	1.63
25																	5	1.93
30																	5	2.23
介子大小	4.8-5.2			4.8-5.2			5.8-6.2			5.8-6.2			6.8-7.2			7.8-8.2		
头厚角度																		

杯头内六角自攻螺丝参数

参考标准:HA 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求




d:代表螺纹直径 L:代表总长度(含头部)
k:代表头部厚度 dk:代表头部直径

价格 规格 长度	M2 报价	包装 数量/千	单重 kg/千	M2.6 报价	包装 数量/千	单重 kg/千	M3 报价	包装 数量/千	单重 kg/千	M3.5 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千	M5 报价	包装 数量/千	单重 kg/千
5		10	0.19															
6		10	0.22		7	0.32												
8		10	0.23		5	0.38		4.0	0.60									
10		7	0.24		5	0.44		3.5	0.70		2.5	0.95		1.8	1.23			
12		6	0.28		4	0.47		3.5	0.75		2.0	1.05		1.5	1.40			
14		5	0.32		4	0.51		2.5	0.80		1.8	1.16		1.4	1.54			
16		4	0.36		3	0.55		2.2	0.88		1.7	1.26		1.2	1.68		0.5	2.88
20								1.8	1.00		1.5	1.47		1.0	1.96		0.5	3.31
25											1.3	1.74		0.8	2.30		0.4	3.78
30											1.0	2.00		0.7	2.65		0.35	4.25
牙距																		

大扁头十字自攻螺丝参数

参考标准:TA 材质:304HC 单位:元/千件
材质:铁, 备注: 加硬或电镀按客需求




d:代表螺纹直径 L:代表总长度(含头部)
k:代表头部厚度 dk:代表头部直径

价格 规格 长度	M3 报价	包装 数量/千	单重 kg/千	M3.6 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千	M5 报价	包装 数量/千	单重 kg/千
6												
8												
10												
12												
14												
16												
18												
20												
22												
30												
40												
45												
50												
55												
60												
牙距												

盘头十字机牙螺丝参数

参考标准:PM 材质:304HC 单位:元/千件
材质:铁, 备注: 加硬或电镀按客需求




d:代表螺纹直径 L:代表总长度(含头部)
k:代表头部厚度 dk:代表头部直径

规格 长度	M1			M1.2			M1.4			M1.6			M2.0			
	报价	包装 数量/千	单重 kg/千	报价	包装 数量/千	单重 kg/千	报价	包装 数量/千	单重 kg/千	报价	包装 数量/千	单重 kg/千	报价	包装 数量/千	单重 kg/千	
2		10	0.02													
3		10	0.02		10	0.04		10	0.05		10	0.06		10	0.13	
4		10	0.02		10	0.04		10	0.06		10	0.08		10	0.14	
5		10	0.03		10	0.05		10	0.07		10	0.09		10	0.16	
6		10	0.03		10	0.05		10	0.07		10	0.11		10	0.18	
8		10	0.04		10	0.06		10	0.09		10	0.13		10	0.2	
10					10	0.07		10	0.1		10	0.15		10	0.27	
12											10	0.18		10	0.31	
14											10	0.19		10	0.33	
16											10	0.21		10	0.36	
18														10	0.4	
20														10	0.42	
22														10	0.46	
25														5	0.49	
30														0.5	0.57	
头部大小	1.6-1.8			1.8-2.0			2.3-2.5			2.8-3.0			3.4-3.6			
头厚角度	0.5-0.6			0.6-0.8			0.6-0.8			1-1.2			1.1-1.3			
牙 距	0.25			0.25			0.3			0.35			0.4			

盘头十字机牙螺丝参数

参考标准:PM 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求




d:代表螺纹直径 L:代表总长度(含头部)
k:代表头部厚度 dk:代表头部直径

价格 规格 长度	M2.5			M3			M3.5			M4		
	报价	包装 数量/千	单重 kg/千	报价	包装 数量/千	单重 kg/千	报价	包装 数量/千	单重 kg/千	报价	包装 数量/千	单重 kg/千
3		10	0.21		10	0.35						
4		10	0.23		10	0.38						
5		10	0.25		10	0.45						
6		10	0.27		10	0.47		10	0.61		3.5	0.89
8		10	0.35		10	0.54		5	0.68		3	1.02
10		10	0.38		10	0.62		5	0.84		2.5	1.21
12		10	0.45		10	0.72		5	0.95		2	1.306
14		10	0.5		10	0.82		5	1.05		1.8	1.4
16		10	0.57		5	0.92		5	1.16		2.7	1.54
18		10	0.63		5	1.03		4	1.27		1.4	1.75
20		10	0.67		5	1.15		4	1.4		1.2	1.9
22		5	0.73		5	1.18		4	1.5		1.1	2.09
25		5	0.78		5	1.25		4	1.67		0.9	2.32
30		5	0.89		5	1.35		3.5	1.94		0.6	2.65
35					4	1.45		3	2.21		0.5	3
40					3.5	1.55		2.5	2.49		0.45	3.35
45					3	1.65		2	2.76		0.4	3.7
50								1.5	3.04		0.35	4.05
头部大小	4.3-4.5			5.2-5.5			5.5-6.0			6.5-6.8		
头厚角度	1.5-1.7			1.7-1.9			2.0-2.2			2.2-2.4		
牙 距	0.45			0.5			0.6			0.7		

沉头十字机牙螺丝参数

参考标准:KM 材质:304HC 单位:元/千件
材质:铁, 备注: 加硬或电镀按客需求

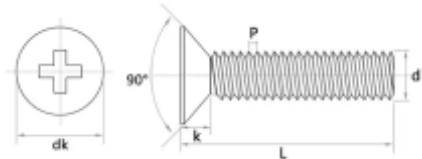

d:代表螺纹 L:代表总长度 p:代表螺距
t:代表内六角深度 s:六角对边距离




价格 规格 长度	M1.0 报价	包装 数量/千	单重 kg/千	M1.2 报价	包装 数量/千	单重 kg/千	M1.4 报价	包装 数量/千	单重 kg/千	M1.6 报价	包装 数量/千	单重 kg/千	M2.0 报价	包装 数量/千	单重 kg/千
3		10	0.02		10	0.02		10	0.03						
4		10	0.02		10	0.03		10	0.04					10	0.1
5		10	0.02		10	0.03		10	0.05		10	0.04		10	0.11
6		10	0.03		10	0.04		10	0.06		10	0.06		10	0.13
8		10	0.04		10	0.04		10	0.07		10	0.07		10	0.18
10					10	0.05		10	0.08		10	0.1		10	0.21
12											10	0.12		10	0.25
14											10	0.15		10	0.27
16											10	0.18		10	0.3
18												0.21		10	0.31
20														10	0.36
22														10	0.4
25														10	0.47
30														10	0.58
头部大小	1.6-1.8			1.8-2.0			2.3-2.5			2.8-3.0			3.4-3.6		
头厚角度	90° +/-2			90° +/-2			90° +/-2			90° +/-2			90° +/-2		
牙 距	0.25			0.25			0.3			0.35			0.4		

沉头十字机牙螺丝参数

参考标准:KM 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或由硬按客需求

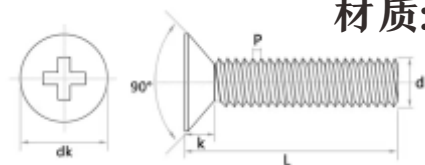

d:代表螺纹 L:代表总长度 p:代表螺距
t:代表内六角深度 s:六角对边距离



价格 规格 长度	M2.5 报价	包装 数量/千	单重 kg/千	M3 报价	包装 数量/千	单重 kg/千	M3.5 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千
3												
4												
5		10	0.19		10	0.27						
6		10	0.21		10	0.32						
8		10	0.26		10	0.4		5	0.69		3.2	0.8
10		10	0.33		10	0.48		5	0.8		2.5	0.972
12		10	0.39		10	0.57		5	0.9		2.2	1.095
14		10	0.44		10	0.65		5	1		2	1.23
16		10	0.49		10	0.74		5	1.11		1.6	1.378
18		10	0.55		10	0.83		5	1.21		1.5	1.54
20		10	0.61		5	0.93		4	0.32		1.3	1.71
22		10	0.66		5	1.02		4	1.43		1.2	1.87
25		10	0.73		5	1.45		4	1.58		1.1	2.11
30		5	0.87		4	1.76		3	1.83		1	2.52
35					3	2.07		3	2.08		0.8	2.92
40					3	2.38		2.5	2.33		0.6	3.33
45					2.5	2.69		2	2.58		0.5	3.72
50								2	2.83		0.4	4.12
头部大小	4.3-4.6			5.2-5.5			6.0-6.4			7.0-7.3		
头厚角度	90° +/-2			90° +/-2			90° +/-2			90° +/-2		
牙距	0.45			0.5			0.6			0.7		

带介十字机牙螺丝参数



参考标准:PWM 材质:304HC 单位:元/千件


材质:铁, 备注:加硬或电镀按客需求

价格 规格 长度	M2.0 报价	包装 数量/千	单重 kg/千	M2.5 报价	包装 数量/千	单重 kg/千	M3 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千
4		10	0.24		10	0.33		10	0.47			
5		10	0.24		10	0.35		10	0.55			
6		10	0.25		10	0.38		10	0.56		5	0.91
8		10	0.28		10	0.44		10	0.66		5	0.94
10		10	0.33		10	0.5		10	0.72		5	1.21
12		10	0.39		10	0.56		10	0.78		5	1.31
14					10	0.61		10	0.86		5	1.54
16					10	0.67		5	0.96		5	1.65
18					10	0.73		5	1.08		5	1.76
20					10	0.79		5	1.19		5	1.94
25											4	2.39
30											3	2.84
介子大小	4.8-5.2			5.8-6.2			6.8-7.2			7.8-8.2		
牙 距	0.4			0.45			0.5			0.7		

大扁头十字机牙螺丝参数

参考标准:TM 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求

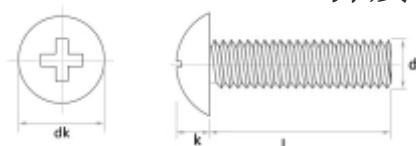

d:代表螺纹直径 L:代表总长度(含头部)
k:代表头部厚度 dk:代表头部直径



价格 规格 长度	M3 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千	M5 报价	包装 数量/千	单重 kg/千	M6 报价	包装 数量/千	单重 kg/千
3												
4												
5												
6												
8												
10												
12												
14												
15												
16												
18												
20												
22												
25												
28												
30												
35												
40												
45												
50												
头部大小	6.9-0.5			9.4-0.5			11.8-0.6			13.1-13.4		
头厚角度	1.9±0.15			2.5±0.15			3.1±0.15			3.3±3.6		
牙距	0.5			0.7			0.8			1		

盘头十字三组合机牙螺丝参数

参考标准:GB9074.8 材质:304HC 单位:元/千件



材质:铁, 备注: 加硬或电镀按客需求

价格 规格 长度	M2 报价	包装 数量/千	单重 kg/千	M2.5 报价	包装 数量/千	单重 kg/千	M3 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千	M5 报价	包装 数量/千	单重 kg/千
4		10													
5		10	0.21		10	0.38		10	0.65						
6		10	0.24		10	0.41		10	0.67		5	1.33			
8		10	0.25		10	0.47		5	0.72		5	1.51			
10		10	0.3		10	0.51		5	0.77		4	1.66			
12		10	0.33		10	0.68		5	0.93		4	1.8			
14					5	0.82		5	1.02		4	1.93			
16					5	0.97		5	1.08		3.5	2.05			
18					4	1.43		5	1.18		3	2.2			
20					3	1.89		5	1.29		3	2.35			
22								4	1.34		2.5	2.5			
25								3	1.5		2.5	2.75			
28											2	2.9			
30											2	3.05			
35															
40															
头部大小	3.4-3.6			4.2-4.5			5.2-5.5			6.4-6.9			8.5-6.9		
平垫大小	3.6-4.0			5.6-6.0			6.6-7.0			8.6-9.0			9.6-10		
头厚角度	1.1-1.3			1.3-1.5			1.7-1.9			2.2-2.4			8.4-8.8		
牙 距	0.4			0.45			0.5			0.7			0.8		

六角凹头十字三组合机牙螺丝参数

参考标准:GB9074.13 材质:304HC 单位:元/千件 
材质:铁, 备注: 加硬或电镀按客需求

价格 规格 长度	M3 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千	M5 报价	包装 数量/千	单重 kg/千	M6 报价	包装 数量/千	单重 kg/千	M8 报价	包装 数量/千	单重 kg/千
5															
6															
8															
10															
12															
14															
16															
18															
20															
22															
25															
30															
35															
40															
45															
50															
55															
60															
头部大小	5.2-5.5			6.4-6.9			8.5-6.9			9.8-10.5			13-13.5		
平垫大小	6.6-7.0			8.6-9.0			9.6-10			11.6-12			15.6-16		
头厚角度	1.7-1.9			2.2-2.4			8.4-8.8			9.8-9.5			13-13.5		
牙 距	0.5			0.7			0.8			1			1.25		


碰焊机牙螺丝参数

参考标准:GB/T 902.3

材质:304HC

单位:元/千件

材质:铁, 备注:加硬或电镀按客需求

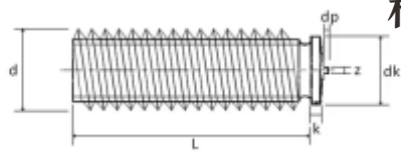

d:代表螺纹直径 dp:代表焊点厚度 z:代表焊点直径
dk:代表头部直径 k:代表头部厚度 L:代表螺纹长度




价格 规格 长度	M3 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千	M5 报价	包装 数量/千	单重 kg/千	M6 报价	包装 数量/千	单重 kg/千	M8 报价	包装 数量/千	单重 kg/千
4		10	0.24												
5		10	0.28		10	0.45									
6		10	0.32		10	0.52		5	0.95						
7		10	0.36		10	0.59		5	1						
8		10	0.39		10	0.73		5	1.03		5	1.75			
10		10	0.49		5	0.82		5	1.35		4	1.05			
12		10	0.54		5	1		5	1.52		4	1.29			
14		10	0.64		5	1.1		3	1.83		3	2.62			
15		10	0.68		5	1.2		5	1.92		3	2.79			
16		10	0.73		5	1.3		5	2.1		3	2.95		1	5.61
18		5	0.78		5	1.5		3	2.2		2.5	3.28		1	6.2
20		5	0.91		4	1.55		2	2.53		2	3.67		1	6.9
25		5	1.1		3	1.87		2	3.08		2	4.48		1	8.4
30		4	1.4		3	2.28		1	3.67		1	5.4		0.7	10
35		4	1.7		2	2.63		1	4.16		1	6.22		0.5	11.2
40					1.5	3		1	4.76		1	7.13		0.5	13.1
45											0.9	7.63		0.4	14.2
50											0.8	8.13		0.3	15.4
介子大小	4.35-4.65			7+/-0.3			8.7+/-0.3			104+/-0.5			13.9+/-0.5		
介子厚度	0.7-1.3			0.7-1.3			0.8-1.4			0.8-1.4			0.9-1.5		
点大小	0.52-0.78			0.52-0.78			0.62-0.88			0.62-0.88			0.62-0.88		
点高	0.27-0.53			0.37-0.63			0.47-0.6			30.57-0.83			0.67-0.93		
牙距	0.5			0.7			0.8			1			1.25		

杯头内六角机牙螺丝参数

参考标准:DIN912 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求

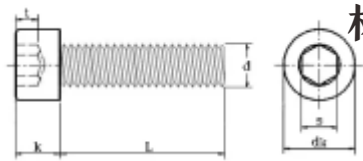

d:代表螺纹直径 L:代表螺纹长度 k:代表头部厚度
dk:代表头部直径 s:代表六角对边 t:代表螺纹深度




价格 规格 长度	M1.4			M1.6			M2.0		
	报价	盒装 数量/千	单重 kg/千	报价	盒装 数量/千	单重 kg/千	报价	盒装 数量/千	单重 kg/千
3		1	0.73		10	0.09		10	0.18
4		1	0.8		10	0.1		10	0.19
5		1	0.9		10	0.1		10	0.21
6		1	0.94		10	0.12		10	0.23
8		1	1.12		10	0.15		10	0.26
10		1	1.27		10	0.16		6	0.29
12		1	1.43		7	0.17		4	0.33
14					5	0.21		8	0.38
16					5	0.23		7	0.39
18								5	0.42
20								5	0.47
22								5	0.52
25								4	0.56
28								3	0.6
30								3	0.63
头部大小	2.7+/-0.2			2.8+/-0.2			3.62+/-0.2		
头厚角度	1.5+/-0.1			1.7+/-0.2			1.8+/-0.2		
内六角对边	1.28-1.3			1.52-1.56			1.52-1.56		
牙 距	0.3			0.35			4		

杯头内六角机牙螺丝参数

参考标准:DIN912 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求

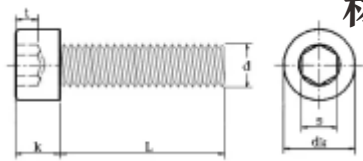


d:代表螺纹直径 L:代表螺纹长度 k:代表头部厚度
dk:代表头部直径 s:代表六角对边 t:代表螺纹深度

价格 规格 长度	M2.5 报价	盒装 数量/千	单重 kg/千	M3 报价	盒装 数量/千	单重 kg/千	M4 报价	盒装 数量/千	单重 kg/千
3		5	0.31		8	0.53		2	1.27
4		7	0.31		8	0.56		1.7	1.45
5		5	0.35		5	0.57		1.5	1.63
6		6	0.37		5	0.66		1.2	1.74
8		5	0.46		5	0.72		1.2	1.92
10		4	0.48		5	0.8		1	2.03
12		4	0.55		4	0.89		1	2.18
14		3	0.62		2	0.97		1.1	2.33
16		5	0.65		2	1.05		1	2.49
18		4	0.72		1.7	1.13		0.7	2.7
20		4	0.8		3.3	1.22		0.65	2.9
22		3	0.83		3	1.31		0.6	3.06
25		3	0.94		1.2	1.42		0.5	3.44
28		2	1.08		1	1.53		0.45	3.8
30		2	1.06		1	1.61		0.5	4.15
					1			0.45	4.49
					1			0.4	4.84
					0.8			0.35	5.23
					0.8				
					0.8				
					0.5				
头部大小	4.3+/-0.2			5.3+/-0.2			6.8+/-0.2		
头厚角度	2.3+/-0.2			2.9+/-0.14			3.82+/-0.2		
内六角对边	2.02-2.06			2.52-2.58			3.02-3.08		
牙 距	0.45			0.5			0.7		

盘头内六角机牙螺丝参数

参考标准:ISO7380 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求




d:代表螺纹直径 L:代表总长度(不含头部) t:代表六角深度
k:代表头部厚度 s:代表六角对边 dk:代表头部直径

规格 长度	M2 报价	盒装 数量/千	单重 kg/千	M2.5 报价	盒装 数量/千	单重 kg/千	M3 报价	盒装 数量/千	单重 kg/千	M4 报价	盒装 数量/千	单重 kg/千
3		10	0.13		10	0.19						
4		10	0.14		10	0.25		10	0.37			
5		10	0.15		10	0.26		8	0.42			0.81
6		10	0.19		10	0.32		6	4.65			0.92
8		10	0.2		10	0.37		5	0.54			1.08
10		10	0.25		10	0.39		4	0.61			1.16
12		10	0.28		10	0.49		3.5	0.71			1.29
14		10	0.32		10	0.49		3	0.76			1.46
15		10	3.33		10	0.51		2.5	8.05			
16		10	3.5		10	0.54		2.5	8.55			1.58
18		10	3.85		10	0.58		2	9.55			
20		10	4.2		10	0.63		2	1.02			
头部大小	3.5+/-0.22			4.5+/-0.3			5.7+/-0.3			7.6+/-0.36		
头厚角度												
内六角对边	1.27-1.295			1.52-1.545			2.02-2.045			2.52-2.58		
牙 距	0.4			0.45			0.5			0.7		

盘头内六角机牙螺丝参数

参考标准:ISO7380 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求



d:代表螺纹直径 L:代表总长度(不含头部) t:代表六角深度

k:代表头部厚度 s:代表六角对边 dk:代表头部直径

价格 规格 长度	M5			M6			M8			M10		
	报价	盒装 数量/千	单重 kg/千	报价	盒装 数量/千	单重 kg/千	报价	盒装 数量/千	单重 kg/千	报价	盒装 数量/千	单重 kg/千
8												
10												
12												
14												
15												
16												
18												
20												
22												
25												
28												
30												
35												
40												
45												
50												
55												
60												
65												
70												
头部大小	9.5+/-0.36			10.5+/-0.43			14+/-0.83			17.5+/-0.43		
头厚角度	2.7+/-0.25			3.2+/-0.3			4.3+/-0.3			5.5+/-0.4		
内六角对边	3.02-3.08			4.02-4.09			5.02-5.09			6.02-6.12		
牙 距	0.8			1			1.25			1.5		

沉头内六角机牙螺丝参数



参考标准:DIN7991 材质:304HC 单位:元/千件
材质:铁, 备注: 加硬或电镀按客需求

价格 规格 长度	M2 报价	盒装 数量/千	单重 kg/千	M2.5 报价	盒装 数量/千	单重 kg/千	M3 报价	盒装 数量/千	单重 kg/千	M4 报价	盒装 数量/千	单重 kg/千
3		10	0.1		10	0.14						
4		10	0.1		10	0.18		95	0.3			
5		10	0.11		10	0.21		8	0.35			
6		10	0.13		10	0.22		7	0.4		3.5	0.771
8		10	0.18		10	0.28		5	0.46		2.8	1.95
10		10	0.2		10	0.36		4.5	0.57		2.6	1.13
12		10	0.25		10	0.42		3.6	0.64		2.5	1.162
14		10	0.29		10	0.48		3	0.71		1.7	1.331
16		10	0.34		10	0.54		2.6	0.78		1.5	1.56
18		10	0.39		10	0.6		2.5	0.96			
20		10	0.44		10	0.66		2	1.13			
35								0.9	1.58			
头部大小	4+/-0.3			5+/-0.3			6+/-0.3			8+/-0.3		
头厚角度	90° +/-2			90° +/-2			90° +/-2			90° +/-2		
内六角对边	1.27-1.31			1.52-1.56			2.02-2.06			2.52-2.58		
牙 距	0.4			0.45			0.5			0.7		

沉头内六角机牙螺丝参数参数

参考标准:DIN7991 材质:304HC 单位:元/千件

材质:铁, 备注: 加硬或电镀按客需求



价格 规格 长度	M5 报价	盒装 数量/千	单重 kg/千	M6 报价	盒装 数量/千	单重 kg/千	M8 报价	盒装 数量/千	单重 kg/千
10									
12									
14									
16					0.7	3.8		0.35	7.71
18									
20									
22									
25					0.4	5.28			
28									
30									
35									
40					0.25	7.85			
45					0.2	8.64			
50					0.2	9.48			
头部大小	10+/-0.36			12+/-0.43			16+/-0.43		
头厚角度	90° +/-2			90° +/-2			90° +/-2		
内六角对边	3.02-3.08			4.02-4.09			5.02-5.14		
牙 距	0.8			1			1.25		

紧定内六角机牙螺丝参数



参考标准:DIN916 913 材质:304HC 单位:元/千件
材质:铁, 备注: 加硬或电镀按客需求

价格 规格 长度	M1.6 报价	包装 数量/千	单重 kg/千	M2.0 报价	包装 数量/千	单重 kg/千	M2.5 报价	包装 数量/千	单重 kg/千	M3 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千
3		10	0.03		40	0.04		30	0.06		30	0.08		10	0.16
4		10	0.04		30	0.06		25	0.09		20	0.11		10	0.19
5		10	0.05		25	0.08		20	0.11		15	0.16		9	0.25
6		10			20	0.09		20	0.14		12	0.19		7	0.32
8		10			20	0.13		10	0.2		9	0.28		5	0.48
10					15	0.16		10	0.24		7	0.36		4	0.62
12					10	0.2		8	0.31		7	0.44		3	0.76
16					7	0.27		5	0.42		5	0.59		2.2	1.06
20											5	0.76		1.5	1.33
25														1	
内六角大小	0.7-0.75			0.91-0.95			1.28-1.3			1.52-1.55			2.02-2.05		
牙 距	0.35			0.4			0.45			0.5			0.7		

紧定内六角机牙螺丝参数



参考标准:DIN916 913 材质:304HC 单位:元/千件
材质:铁, 备注: 加硬或电镀按客需求

价格 规格 长度	M5 报价	包装 数量/千	单重 kg/千	M6 报价	包装 数量/千	单重 kg/千	M8 报价	包装 数量/千	单重 kg/千	M10 报价	包装 数量/千	单重 kg/千
4		8	0.29		5	0.45						
5		6	0.37		4	0.59						
6		5	0.49		3.5	0.66						
8		3.5	0.71		5	0.93		1	1.76			
10		2.5	0.91		1.8	1.27		1	2.3		0.7	3.424
12		1.5	1.71		1.5	1.62		0.8	2.78		0.4	4.285
16		1.5	1.62		1	2.34		0.5	3.98		0.3	6.13
20		1.2	2.12		0.8	2.99		0.35	4.85		0.2	8.1
25		0.9	2.8		0.6	3.93		0.35	6.8		0.25	10.5
30		0.5	3.22		0.5	4.66		0.3	8.19		0.2	12.9
35		0.4			0.5	5.4		0.25	9.84			
40								0.2	11.5			
内六角大小	2.52-2.55			3.02-3.05			4.05-4.1			5.05-5.1		
牙 距	0.8			1			1.25			1.5		

压铆螺丝参数

YIHUASHENG®



参考标准:FHS 材质:304HC 单位:元/千件

材质:铁， 备注：加硬或电镀按客需求

价格 规格 长度	M2.5 报价	包装 数量/千	单重 kg/千	M3 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千	M5 报价	包装 数量/千	单重 kg/千	M6 报价	包装 数量/千	单重 kg/千	M8 报价	包装 数量/千	单重 kg/千
6																		
8																		
10																		
12																		
14																		
15																		
16																		
18																		
20																		
22																		
25																		
26																		
28																		
30																		
35																		
头部大小																		
牙 距	0.45			0.5			0.7			0.8			1			1.25		

美制压铆螺丝参数



参考标准:FHS 材质:304HC 单位:元/千件

材质:铁, 备注: 加硬或电镀按客需求

价格 规格 长度	10#-32	盒装	单重	10#-24	盒装	单重	1/4-20	盒装	单重	5/16-18	盒装	单重
	报价	数量/千	kg/千	报价	数量/千	kg/千	报价	数量/千	kg/千	报价	数量/千	kg/千
1/4 (6.35) -4												
5/16 (7.94) -5												
3/8 (9.53) -6												
1/2 (12.7) -8												
5/8 (15.87) -10												
3/4 (19.05) -12												
7/8 (22.23) -14												
1 ‘ (25.4) -16												
1-1/4 (31.75) -20												
1-1/2 (38.1) -24												
头部大小												
牙 距												


沉头十字机牙螺丝参数

参考标准:UNC-AMP

材质:304HC

单位:元/千件

材质:铁, 备注:加硬或电镀按客需求

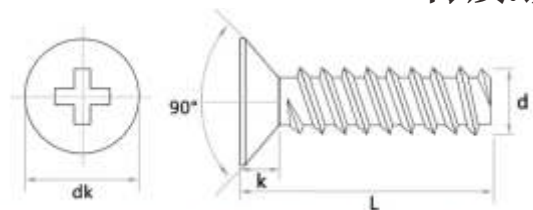

d:代表螺纹直径 L:代表总长度(含头部)
k:代表头部厚度 dk:代表头部直径




价格 规格 长度	4#-40 报价	盒装 数量/千	单重 kg/千	6#-32 报价	盒装 数量/千	单重 kg/千	8#-32 报价	盒装 数量/千	单重 kg/千
3/16 (4.76)		10	0.26		10	0.32			
1/4 (6.35)		10	0.31		10	0.47		5	0.71
5/16 (7.94)		10	0.37		10	0.53		5	0.82
3/8 (9.53)		10	0.43		5	0.63		5	0.95
1/2 (12.7)		10	0.52		5	0.83		5	1.19
5/8 (15.88)		5	0.65		5	0.95		4	1.4
3/4 (19.05)		5	0.75		5	1.13		4	1.69
7/8 (22.23)		5	0.85		4	1.31		3	1.93
16 (25.4)		5	0.96		3	1.47		3	2.17
1-1/4 (31.75)					2	1.86		2.5	2.66
1-1/2 (38.1)					2	2.18		2	3.15
1-3/4 (44.45)					2	2.5		2	3.83
2' (50.8)								1.5	4.23
头部大小	5.2-5.5			6.5-6.9			7.7-8.1		
头厚角度	90° +/-2			90° +/-2			90° +/-2		
牙 距	40			32			32		

蝶形螺丝参数

参考标准:DIN316 材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求

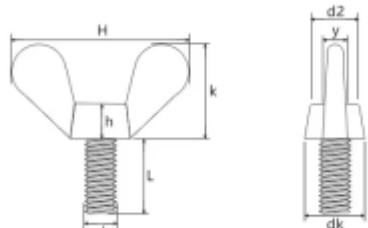

d:代表螺纹直径 L:代表螺纹长度 dk:代表头部底部直径
k:代表头部厚度 H:代表头部宽度 h:代表头径厚度
y:代表碟片厚度 d2:代表头部顶端直径

价格 规格 长度	M3 报价	盒装 数量/千	单重 kg/千	M4 报价	盒装 数量/千	单重 kg/千	M5 报价	盒装 数量/千	单重 kg/千	M6 报价	盒装 数量/千	单重 kg/千	M8 报价	盒装 数量/千	单重 kg/千
8															
10		1	2.31		1	4.51		0.8	5.23		2.5				
12		0.5	2.4		1	5.03		0.8	5.74		0.25	9.6			
16		0.5	2.5		1	4.56		0.8	5.9		0.25	9.8			
20		0.5	2.78		1	5.17		0.55	6.12		0.25	10		0.25	17.2
25		0.5			0.8	5.78		0.55	6.86		0.2	11.2		0.25	18.2
30		0.5			0.5	6.2		0.5	7.19		0.2	12.4		0.2	18.8
35						6.5		0.45	7.63		0.2	12.5		0.2	21.3
40											0.2	12.6		0.15	23
45											0.15	13.5			
50															
60															
70															
牙 距		0.5			0.7			0.8			1			1.25	

外六角机牙螺丝参数



参考标准:材质:304HC 单位:元/千件
材质:铁, 备注: 加硬或电镀按客需求

价格 规格 长度	M3 报价	包装 数量/千	单重 kg/千	M4 报价	包装 数量/千	单重 kg/千	M5 报价	包装 数量/千	单重 kg/千	M6 报价	包装 数量/千	单重 kg/千	M8 报价	包装 数量/千	单重 kg/千	M10 报价	包装 数量/千	单重 kg/千
8																		
10																		
12																		
14																		
16																		
18																		
20																		
22																		
25																		
30																		
35																		
40																		
45																		
50																		
头部大小	5.2+/-0.3			7+/-0.3			8.0+/-0.3			10.0+/-0.5			13.0 +/-0.5			16.0+/-0.5		
头厚角度																		
牙 距	0.50			0.70			0.80			1.00			1.25			1.50		

平垫、弹介、内外齿平垫、开口卡参数

参考标准:材质:304HC 单位:元/千件

材质:铁, 备注:加硬或电镀按客需求



平 垫				弹 介				内 齿			
DIN125A				GB93				GB861.1			
规格	价格	包装数量/千	单重kg/千	规格	价格	包装数量/千	单重kg/千	规格	价格	包装数量/千	单重kg/千
M2		50	0.05	M2		100	0.02				
M2.5		40	0.08	M2.5		50	0.04				
M3		20	0.11	M3		50	0.06	M3		10	0.05
M4		10	0.19	M4		20	0.15	M4		10	
M5		5	0.36	M5		6	0.26	M5		10	0.11
M6		3	0.77	M6		7	0.46	M6		10	0.14
M8		1.8	1.44	M8		4	0.97	M8		10	0.26
M10		0.7	3.02	M10		1	2	M10		4	0.7
M12		0.5	4.23	M12		0.5	3.22	M12			
								M14			



开口卡											
规格	价格	包装数量/千	单重kg/千	规格	价格	包装数量/千	单重kg/千	规格	价格	包装数量/千	单重kg/千
M1.2		10		M5		10		M12		3	
M1.5		10		M6		10		M14		2.5	
M2.0		10		M7		5		M15		2.5	
M2.5		10	0.05	M8		5					
M3.0		10	0.08	M9		5					
M3.5		10		M10		5					
M4		10	0.13	M11		5					

平垫、弹介、内外齿平垫、开口卡参数

参考标准:材质:304HC 单位:元/千件

材质:铁， 备注：加硬或电镀按客需求



内多齿				外 齿				外多齿			
GB81.2				GB862.1				GB862.2			
规格	价格	包装数量/千	单重kg/千	规格	价格	包装数量/千	单重kg/千	规格	价格	包装数量/千	单重kg/千
M3		10	0.05	M3		10	0.05	M3		10	0.06
M4		10		M4		10	0.09	M4		10	
M5		10		M5		10		M5		10	
M6		10	0.18	M6		10	0.18	M6		10	
M8		5		M8		10	0.5	M8		10	
M10		5	0.7	M10		5		M10		5	0.76
M12				M12				M12			
M14				M14				M14			

螺母参数

参考标准:材质:304HC 单位:元/千件

材质:铁， 备注：加硬或电镀按客需求



六角螺母				防松螺母				盖形螺母			
DIN934				DIN985				DIN1587			
规格	价格	包装数量/千	单重kg/千	规格	价格	包装数量/千	单重kg/千	规格	价格	包装数量/千	单重kg/千
M2		20	0.11	M2		10	0.17	M3		6	0.63
M2.5		20	0.22	M2.5		10	0.26	M4		3.5	1.27
M3		10	0.33	M3		10	0.42	M5		2.2	1.87
M4		5	0.68	M4		5	0.85	M6			
M5		4	1.02	M5		4	1.02	M8			
M6		2	2.09	M6		2	2.14	M10			
M8		1	4.58	M8		1	4.52	M12			
M10		0.5	10.3	M10							
M12		0.3	15.4	M12							
				拉帽螺母 							
				规格	价格	包装数量/千	单重kg/千				
				M4							
				M5							
				M6							
				M8							
				M10							

螺母参数

参考标准:材质:304HC 单位:元/千件

材质:铁, 备注: 加硬或电镀按客需求



法兰螺母				蝶形螺母 元/只				压铆螺母			
DIN6923				DIN315							
规格	价格	包装数量/千	单重kg/千	规格	价格	包装数量/千	单重kg/千	规格	价格	包装数量/千	单重kg/千
M3				M3		5	1.71	M3-1			
M4		3	1.37	M4		2	2.09	M3-2			
M5				M5		1.5	2.82	M4-1			
M6				M6		1	5.36	M4-2			
M8				M8				M5-1			
M10				M10				M5-2			
M12				M12				M6-1			
								M6-2			
								M8-1			
								M8-2			

杯头内六角机牙螺丝参数



参考标准:GB70 材质:不锈钢 单位:元/千件
材质:铁, 备注:加硬或电镀按客需求

价格 规格 长度	M2.0 报价	盒装 数量/千	单重 kg/千	M2.5 报价	盒装 数量/千	单重 kg/千	M3 报价	盒装 数量/千	单重 kg/千	M4 报价	盒装 数量/千	单重 kg/千
3		10	0.15		6	0.29		8	0.51		3	1.14
4		10	0.19		5	0.29		8	0.54		4	1.15
5		8	0.21		5	0.33		5	0.55		3.2	1.17
6		8	0.23		4	0.35		4.5	0.64		2.9	1.5
8		5	0.25		4	0.44		5	0.7		1.6	1.55
10		5	0.29		3	0.46		4	0.78		2	1.74
12		5	0.32		6	0.53		2.7	0.87		2	1.88
14		4	0.33		5	0.6		2.6	0.95		2	1.93
16		4	0.41		5	0.63		3.5	1.03		1.5	2.07
18		4	0.49		4	0.7		3	1.11		1.6	2.35
20		4	0.51		3.5	0.78		1.7	1.2		1.35	2.49
22					3	0.86		2.5	2.05		1.15	2.67
25					3	0.92		2	1.4		1	3.1
30						1.04		1.4	1.59		0.8	3.4
35								1	1.84		0.8	3.81
40								1	2.02			
头部大小	3.6-3.8			4.2-4.4			4.9-5.1			6.5-6.9		
头厚角度	1.9-2.05			2.35-2.55			2.75-2.95			3.7-3.9		
内六角对边	1.52-1.56			2.02-2.06								
牙 距	0.4			0.45			0.5			0.7		